

Nyx 330 Wall

Design: Vilhelm Lauritzen Architects

All NYX fittings are robust and vandal proof, made of cast aluminium and diffusers in clear or opalized polycarbonate.

Nyx 330 Wall is available with Comfort LED for efficient, yet pleasant light.


Besides the traditional wall mounting, Nyx 330 Wall can be mounted on customized pole types.



Egtved Gas Compressor Station, architects: C.F. Møller

Nyx 330 Wall

Design: Vilhelm Lauritzen Architects

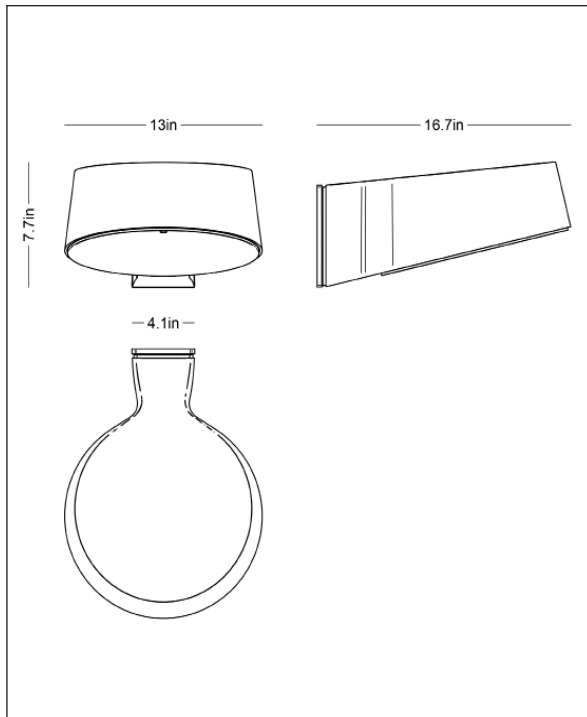

Luminaire specs:

Material:	Cast aluminium
Finish:	Raw anodized Graphite grey: YW355F Silver grey: Y2370I Corten brown: YX355F Black: textured mat Noir 900 Sablé, SN351F, Akzo Nobel RAL by your choice
Screen:	UV-resistant polycarbonate, frosted opal white
Mounting:	On wall
Connection:	In the wall box, 5 x single core AWG18-cables are included
Classification:	cULus; Wet location; IP65; class I; IK10 (with NEMA socket IK09)
Corrosion class:	C4, C5 optional
Weight:	15 lbs
Wind sweeping area:	0,57 ft ²

LED specs:

LED:	FF-DA with an advanced optical cover
Operational life:	min 100,000 hours at ta max 77°F (25°C), L90B10
Color temperature:	2700, 3000, or 4000 Kelvin
Color rendering:	CRI 80
Color accuracy:	5 Steps SDCM

Driver specs:

Driver:	Titanium 55W 0.1-1.8A 0-10V
Inrush current::	@120V; max 23 A (10% after 166,5 µs) @277V; max 51,5 A (10% after 158 µs)
Nominal voltage, AC:	120-277 Vac
Op. input voltage, AC:	108-305 Vac
Nominal voltage, DC:	125-250 Vdc
Nom. frequency range:	50-60 Hz
Surge protection:	L/N-GND: 6 k; L-N: 6 kV
Operational life:	min 100,000 hours
Dimming/control:	0-10V
Other control options:	via NEMA socket

Spec sheet – Nyx 330 Wall

Product number

Product no	Light source
US8104	FF 2x6

Variant

Wattage	Color	Color Temperature
23W 23W	01 RAW Anodized	827 2700K, CRI80
29W 29W	4 Graphite grey	830 3000K, CRI80
35W 35W	9 Silver grey	840 4000K, CRI80
42W 42W	17 Corten brown	
	66 Black textured mat	
	RAL Other RAL color	

Optional

Controls	Corrosion coating	Protection class
Standard 0-10V	Standard C4 Standard	Standard 120-277V (60Hz)
N Nema	C5 C5 Coastal	

Variant info

Wattage	2700K		3000K		4000K		lm/W
	Lumen	BUG	Lumen	BUG	Lumen	BUG	
Item no: US8104							
23W	1289 lm	B1 U1 G1	1359 lm	B1 U1 G1	1437 lm	B1 U1 G1	56-62
29W	1593 lm	B1 U2 G1	1679 lm	B1 U2 G1	1775 lm	B1 U2 G1	55-61
35W	1884 lm	B1 U2 G1	1986 lm	B1 U2 G1	2100 lm	B1 U2 G1	54-60
42W	2163 lm	B1 U2 G1	2280 lm	B1 U2 G1	2411 lm	B1 U2 G1	52-57