


YOYO - PENDANT

Design: C.F. Møller Architects

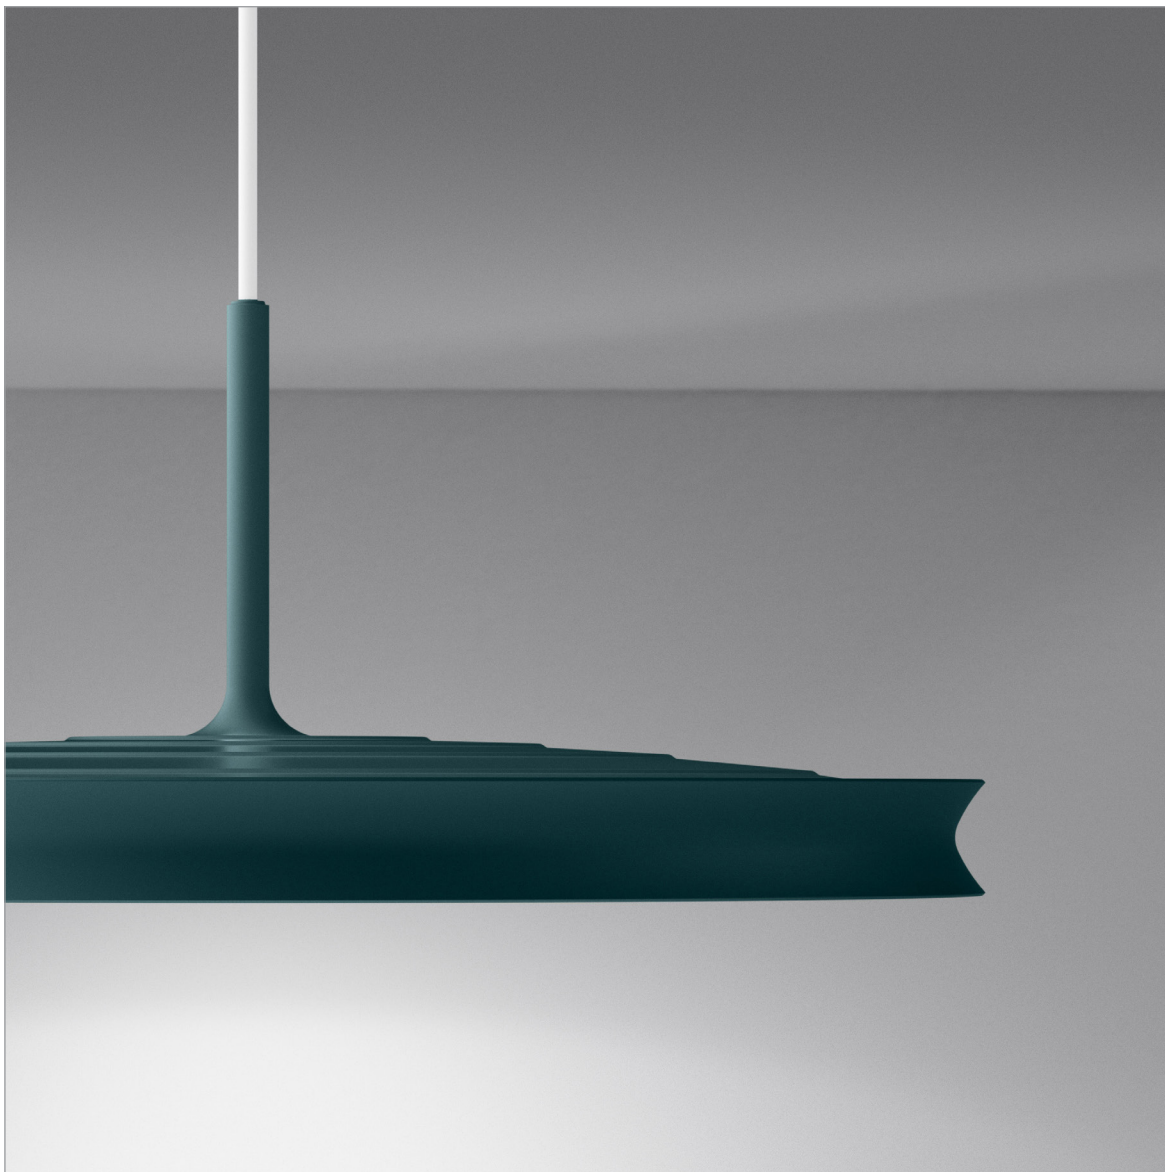

Yoyo is a range of elegant interior light fixtures with low height.

C.F. Møller Architects are the masters of Yoyo's elegant design with distinct curves and slim profiles. Concluded by sharp profiles at both ends, the characteristic parable results in a unique and sculptural look and the impression of a floating luminaire.

Being edge lit the Yoyo fixtures are free from dots and shadows from other components. The light from the edge is guided through the LGP and sent downwards by the top reflector.

Shades for Yoyo are opalised or microprismatic, and the latter is elegant without visible prisms.

Types:

For wall or ceiling, uplight optional
Pendants

Sizes:

Diameter: 225, 350, or 535 mm
Diameter pendant: 350 or 535 mm

Finish:


Various RAL colours

Lighting:

LED: Edge Lit, exchangable
Top reflector + light guide plate (LGP)

Yoyo 350 - PENDANT

Design: C.F. Møller Architects

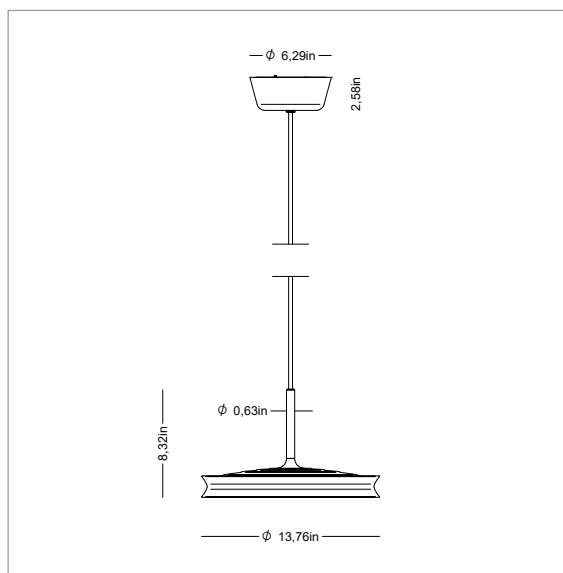

Luminaire specification:

Material: Cast aluminium
Surface: RAW Untreated
RAW Anodized
White RAL 9010
Black RAL 9005
Alu-grey RAL 9006
Yellow RAL 1032
Orange RAL 2003
Blue green RAL 6004
Squirrel grey RAL 7000
Other RAL colors

Shade: Acrylate (PMMA), Opal

Lead: PVC 2x18AWG

Classification: class I

IP rating: IP20

Weight: 4,9 lbs

LED and driver specification:

LED: Edge Lit
Total consumption: 16 / 23 W
Operational life: min 50,000 hours at ta 25°C
L80B10

Color rendering: CRI 90

Color accuracy: 3 Steps SDCM

Driver: 500 / 700 mA


Dimming: 0 - 10V

Operational life: 50,000 hours

F-L LIGHTING

YOYO 350 - PENDANT WITH UPLIGHT

Design: C.F. Møller Architects

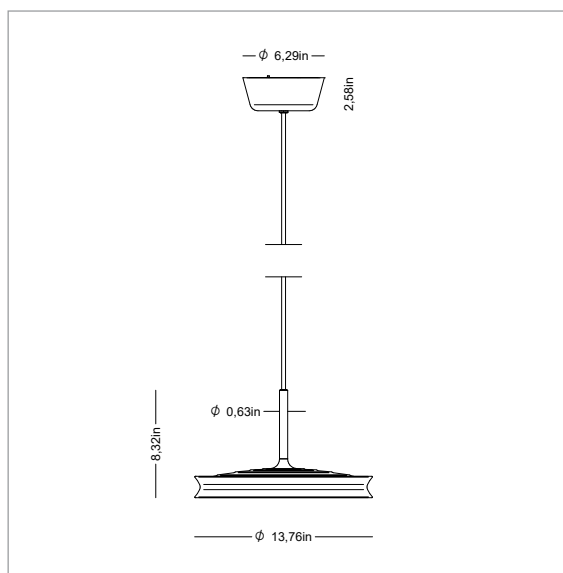

Luminaire specification:

Material: Cast aluminium
Surface: RAW Untreated
RAW Anodized
White RAL 9010
Black RAL 9005
Alu-grey RAL 9006
Yellow RAL 1032
Orange RAL 2003
Blue green RAL 6004
Squirrel grey RAL 7000
Other RAL colors

Shade: Acrylate (PMMA), Opal

Lead: PVC 2x18AWG

Classification: class I

IP rating: IP20

Weight: 4,9 lbs

LED and driver specification:

LED: Edge Lit
Total consumption: 16 / 23 W
Operational life: min 50,000 hours at ta 25°C
L80B10

Color rendering: CRI 90

Color accuracy: 3 Steps SDCM

Driver: 500 / 700 mA

Dimming: 0 - 10V

Operational life: 50,000 hours

F-L LIGHTING

Spec sheet – Yoyo Pendant 350

Product number

Product no	Light source
US1854	No Uplight
US1858	With uplight

Variant

Wattage	Color	Color Temperature
16W 16W	0 RAW Untreated	927 2700K, CRI90
23W 23W	1 White RAL 9010	930 3000K, CRI90
	3 Black RAL 9005	940 4000K, CRI90
	19 Alu-grey RAL 9006	
	102 Yellow RAL1032	
	103 Orange RAL 2003	
	104 Blue green RAL 6004	
	105 Squirrel grey RAL 7000	
	RAL Other colors	

Optional

Controls	Protection class
V 0-10V	W 120-277V (60Hz)

Variant info

Wattage	2700K		3000K		4000K		lm/W
	Lumen	BUG	Lumen	BUG	Lumen	BUG	
Item no: US1854							
16W	1473 lm		1581 lm		1615 lm		92-101
23W	2025 lm		2167 lm		2226 lm		88-97
Item no: US1858							
16W	1228 lm		1319 lm		1347 lm		77-84
23W	1689 lm		1807 lm		1856 lm		73-81