

Nyx 330 Wall

Design: Vilhelm Lauritzen Architects

All NYX fittings are robust and vandal proof, made of cast aluminium and diffusers in clear or opalized polycarbonate.

Nyx 330 Wall is available with Comfort LED for efficient, yet pleasant light.


Besides the traditional wall mounting, Nyx 330 Wall can be mounted on customized pole types.



Egtved Gas Compressor Station, architects: C.F. Møller

Nyx 330 Wall

Design: Vilhelm Lauritzen Architects

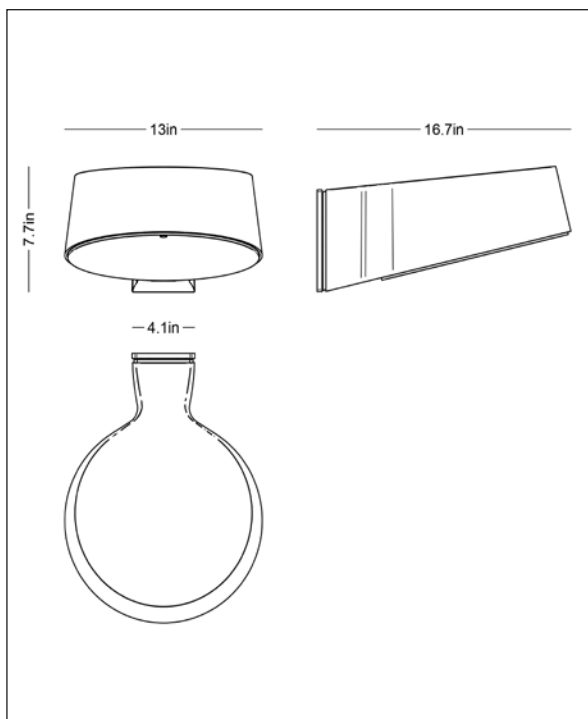

Luminaire specs:

Material:	Cast aluminium
Finish:	Raw anodized Graphite grey: YW355F Silver grey: Y2370I Corten brown: YX355F Black: textured mat Noir 900 Sablé, SN351F, Akzo Nobel RAL by your choice
Shade:	UV-resistant polycarbonate, frosted opal white
Mounting:	On wall
Connection:	In the wall box, 5 x single core AWG18-cables are included
Classification:	cULus; Wet location; IP65; class I; IK10 (with NEMA socket IK09)
Corrosion class:	C4, C5 optional
Weight:	15 lbs
Wind sweeping area:	0,57 ft ²

LED specs:

LED:	FF-DA with an advanced optical cover
Operational life:	min 100,000 hours at ta max 77°F (25°C), L90B10
Color temperature:	2700, 3000, or 4000 Kelvin
Color rendering:	min 80 CRI
Color accuracy:	5 Steps SDCM

Driver specs:

Driver:	Xitanium 55W 0.1-1.8A 0-10V
Inrush current::	@120V; max 23 A (10% after 166,5 µs) @277V; max 51,5 A (10% after 158 µs)
Nominal voltage, AC:	120-277 Vac
Op. input voltage, AC:	108-305 Vac
Nominal voltage, DC:	125-250 Vdc
Nom. frequency range:	50-60 Hz
Surge protection:	L/N-GND: 6 k; L-N: 6 kV
Operational life:	min 100,000 hours
Dimming/control:	0-10V
Other control options:	via NEMA socket

Spec-sheet - Nyx 330 Wall Comfort

Product Info

Item No	Wattage	Current	2700K	3000K	4000K	BUG	lm/W
US8101	23W	550 mA	1289 lm	1359 lm	1437 lm	B1 U1 G1	56-62
US8102	29W	700 mA	1593 lm	1679 lm	1775 lm	B1 U2 G1	55-61
US8103	35W	850 mA	1884 lm	1986 lm	2100 lm	B1 U2 G1	54-60
US8104	42W	1000 mA	2163 lm	2280 lm	2411 lm	B1 U2 G1	52-57

Variant codes

Color	Corrosion Class	Color Temp/CRI	Supply Voltage	Controls
01 raw anodized	C4 C4 Standard	827 2700K, 80 CRI	W 120-277 (60 Hz)	N Nema
17 corten brown	C5 C5 Coastal	830 3000K, 80 CRI		V 0-10V
4 graphite grey		840 4000K, 80 CRI		
66 black textured mat				
9 silver grey				
RAL other RAL colors				

Accessories

Item no	Option
06034	Lamella shade